

Access Doors

# IPR-RRD



## Description


The IPR-RRD revision door is equipped with a polyethylene gasket. It is designed for mounting on round ducts. Construction of the IPR-RRD revision door and its gasket ensure its perfect adherence to a surface of a duct on which it is mounted. This ensures high tightness. A pattern enabling cutting out a hole is delivered together with the door. Resistant up to +200°C

The following types of IPR-RRD revision doors are also available:


- IPR-RRD-K** - revision door made of acid resistant sheet
- IPR-RRD-A** - revision door made of aluminium sheet
- IPR-RRD-I** - revision door designed for insulated duct (a thickness of insulation must be stated in the order. 20 - 55mm are available)
- IPR-RRD-HT** - revision door with a ceramic gasket, resistant up to +300°C

### Example identification

Product code: IPR-RRD - aaa



## Dimensions

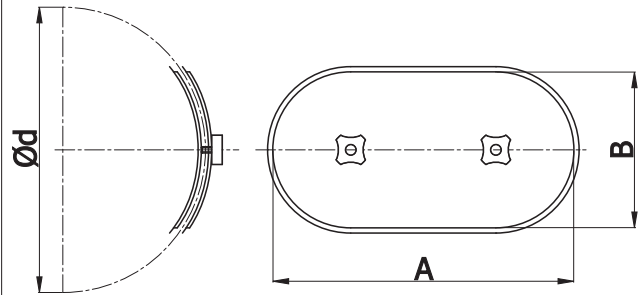

Ød nom [mm]	A [mm]	B [mm]	weight [kg]	range of diameters
80	180	x 80	0,3	76 -85
100	180	x 80	0,3	96-105
125	180	x 80	0,3	121-130
140	180	x 80	0,4	130-155
150	180	x 80	0,4	130-155
160	180	x 80	0,4	156-190
180	200	x 100	0,4	156-190
200	200	x 100	0,4	191-240
224	200	x 100	0,4	191-240
250	200	x 100	0,4	241-300
280	200	x 100	0,4	241-300
300	200	x 100	0,4	301-360
315	200	x 100	0,4	301-360
355	300	x 200	0,4	341-380
400	300	x 200	1,0	381-420
450	300	x 200	1,0	421-470
500	300	x 200	1,0	471-530
560	400	x 300	2,0	531-600
600	400	x 300	2,0	570-640
630	400	x 300	2,0	601-670
710	400	x 300	2,0	671-750
800	400	x 300	2,0	751-850
900	400	x 300	2,0	851-950
1000	500	x 400	4,2	951-1060
1120	500	x 400	4,2	1061-1180
1250	500	x 400	4,2	1181-1320
1400	500	x 400	7,1	1321-1500
1500	500	x 400	9,5	1421-1600
1600	500	x 400	11,2	1501-1800