

Insulated access door for rectangular duct

IPFD



Description


The IPFD access door to access and cleaning of rectangular ducts. The IPFD are made of galvanized steel and the door is additionally sealed with a rubber mat. It also has thermal insulation of glass mineral wool with a thickness of 25 mm. Four clasps allow easy opening and closing. This makes it possible to have a quick access to the ventilation system.

Example identification

Product code: IPFD - aaa

type _____
 AxB _____

Dimensions

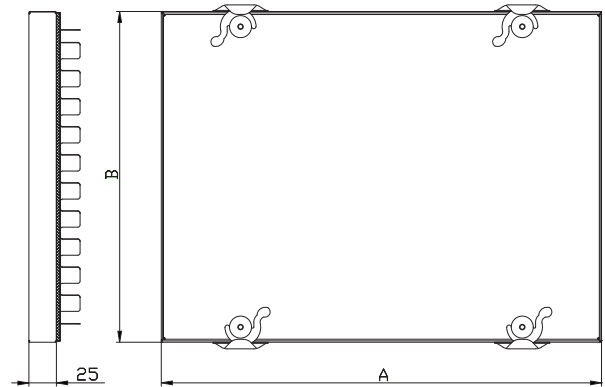

code	A [mm]	L [mm]
IPFD-100-100	100	100
IPFD-150-100	150	100
IPFD-150-150	150	150
IPFD-200-100	200	100
IPFD-200-125	200	125
IPFD-200-200	200	200
IPFD-250-250	250	250
IPFD-300-150	300	150
IPFD-300-200	300	200
IPFD-300-300	300	300
IPFD-350-350	350	350
IPFD-400-200	400	200
IPFD-400-300	400	300
IPFD-400-400	400	400
IPFD-450-300	450	300
IPFD-450-450	450	450
IPFD-500-500	500	500
IPFD-600-300	600	300
IPFD-600-400	600	400
IPFD-600-450	600	450
IPFD-600-600	600	600